



# Part No. 1003468 Wi-Fi/ BT/ Zigbee Ceramic Patch 2.4 GHz Antenna

Supports: Wi-Fi applications, Agriculture, Automotive, Bluetooth, Zigbee, WLAN, Smart Home, Healthcare, Digital Signage



# Ceramic Wi-Fi / BT / Patch Antenna

2400 - 2485 MHz

The Ceramic Patch 1003468 offers all the advantages of a circular polarized 2.4GHz antenna in a small factor, easy to integrate to all the embedded designs requiring high performances and long range

#### **Electrical Specifications**

Typical characteristics, measured on a 50 x 50 mm PCB ground plane.

Frequency (GHz)	2.400 – 2.485
Peak Gain	3.83 dB
Average Efficiency	74 %
VSWR Match	2:1 max
Polarization	Circular RHCP
Feed Point Impedance	50 Ohms unbalanced
Peak Gain	3.83 dB

#### **KEY BENEFITS**

# Reduced Costs and Time-to-Market

Standard antenna eliminates design fees and cycle time associated with a custom solution; getting products to market faster.

## **Quicker Time-to-Market**

By optimizing antenna size, performance and emissions, customer and regulatory specifications are more easily met. Reliability

OBD-II

Products are the latest RoHS version compliant.

#### **APPLICATIONS**

Embedded design
 POS, Headsets, Tablets
 Gateway, Access
 Telematics Tracking
 Healthcare M2M, Industrial devices
 Smart Grid

Point
• Handheld

# **Mechanical Specifications & Ordering Part Number**

Ordering Part Number	1003468
Size (mm)	18.0 x 18.0 x 4.0
Mounting (mm)	Back adhesive and pin
Weight (grams)	4.8
Packaging	Plastic Tray


10/1/2019 Proprietary www.ethertronics.com



2.4 GHz Ceramic Patch Antenna Specifications Ethertronics produces a wide variety of standard and custom antennas to meet user needs.

## **VSWR and Efficiency Plots**


Measured on a 50 x 50 mm ground plane

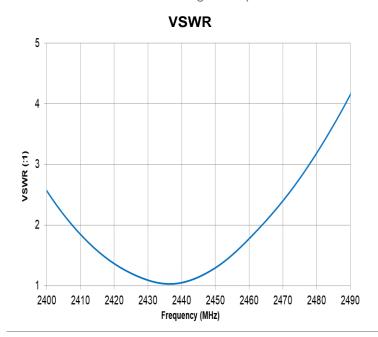






#### **Antenna radiation patterns**

Measured on a 50 x 50 mm ground plane



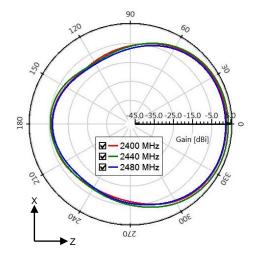



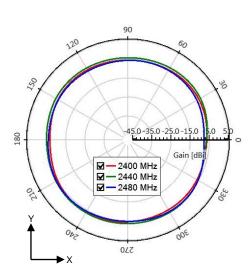



2.4 GHz Ceramic Patch Antenna Specifications
Ethertronics produces a wide variety of standard and custom antennas to meet user needs.

## **Mechanical Dimensions**

Typical antenna dimensions, in mm.

